



### Lucence P40 2WCE X-form

#### Dimensions (approx.)


Chain width:	4 mm
Chain thickness:	2,35 mm
Single tape widths:	13 mm
Length of tape ends:	top: 21±3 mm
	bottom: 21±3mm

#### Features

Glow-In-The-Dark woven polyester tape;

Glow-In-The-Dark slider body out of die casted zinc, puller out of zinc or stamped steel/brass.

Glow-In-The-Dark moulded components made of POM (PolyOxyMethylene)

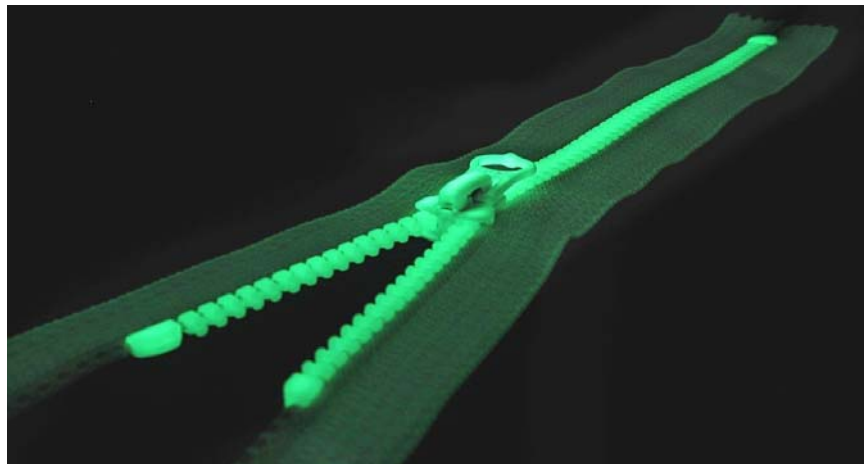

#### Quality

Lateral strength	> 294 N
Lateral strength after reciprocation	> 264 N
Operating force	< 4 N
Reciprocation test (durability)	> 500 cycles
Pull off strength of puller	> 147 N
Slider locking strength	> 39 N
Slider over top stops	> 98 N
Member pull off strength	> 29 N
Member slippage strength	> 39 N

(The quality data represent minimum performance levels)

#### Fastness

		Change	Staining
Washing 40° C	(ISO 105-C06)	3...4	4
Water	(ISO 105-E01)	3...4	4
Dry-cleaning	(ISO 105-D01)	3...4	3...4
Light	(ISO 105-B02)	3...4	
Rubbing wet	(ISO 105-X12)		3... 4
Rubbing dry	(ISO 105-X12)		4

(These fastness grades represent minimum performance levels and, in practice, the majority of shades will exceed these levels)

#### Standards

EN 16732 – class B	CPSIA HR4040;
BS 3084:2006;	F963;
DIN 3416 – 19;	EN71;
Oeko-Tex 100 Class 1	QM System according BS EN ISO 9001:2008

Main uses
Sportswear
Children's wear
Workwear
Back pack / school bags
Outerwear