



### Lucence P60 CC


#### Dimensions (approx.)

Chain width:	6 mm
Chain thickness:	2,8 mm
Single tape widths:	16 mm

#### Features

Glow-In-The-Dark woven polyester tape;

Glow-In-The-Dark moulded components made of POM (PolyOxyMethylene)

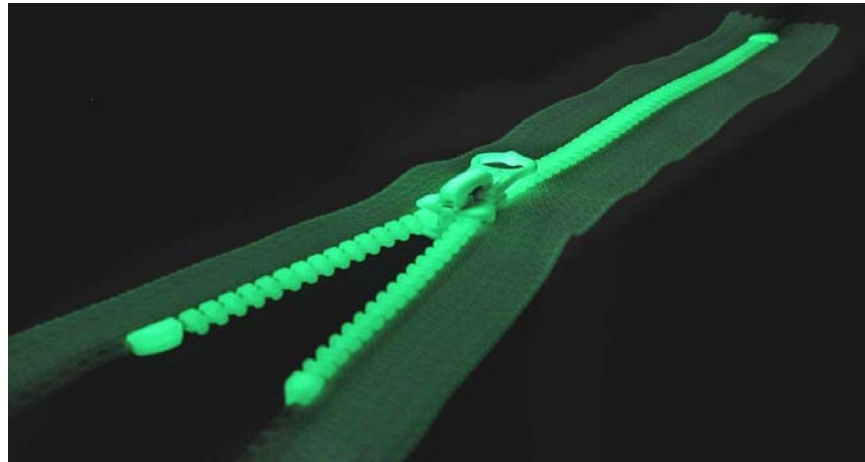

#### Quality

Lateral strength	> 392 N
Lateral strength after reciprocation	> 352 N
Operating force	< 4 N
Reciprocation test (durability)	> 500 cycles
Member slippage	> 49 N
Member pull off	> 49 N

(The quality data represent minimum performance levels)

#### Main uses

Sportswear

Children's wear

Workwear

Back pack / school bags

Outerwear

#### Fastness

		Change	Staining
Washing 40° C	(ISO 105-C06)	3...4	4
Water	(ISO 105-E01)	3...4	4
Dry-cleaning	(ISO 105-D01)	3...4	3...4
Light	(ISO 105-B02)	3...4	
Rubbing wet	(ISO 105-X12)		3... 4
Rubbing dry	(ISO 105-X12)		4

(These fastness grades represent minimum performance levels and, in practice, the majority of shades will exceed these levels)

#### Standards

EN 16732 – class C	CPSIA HR4040;
BS 3084:2006;	F963;
DIN 3416 – 19;	EN71;
Oeko-Tex 100 Class 1;	QM System according BS EN ISO 9001:2008